


LANCER EVOLUTION IX (European)			
Item	Oil / Fluid Grade / Description	Component Type / Variant	Total Capacity
Engine	ACEA and API Classification: A1, A2, A3 / API: SG or higher For Details Regarding Viscosity, See Information Below	4G63	5.3 Litres
Cooling	Mitsubishi Genuine Dia-Queen Super Long Life Coolant or Equivalent (High Quality Ethylene Glycol Antifreeze Coolant)		6.0 Litres
Brake/Clutch Fluid	Dot 3 or Dot 4		As Required
Manual Transmission	Gear Oil API Classification GL-4, SAE 75W-85W, 75W-90	5 Speed	2.8 Litres
Transfer Box (with ACD)	Mitsubishi Genuine LSD Gear Oil: Part No: 8149630 - (3775610) EX or: Castrol Hypoy LS		0.60 Litres
Rear Axle: (Vehicles with AYC/ACD)			
Differential	Mitsubishi Genuine DIA QUEEN LSD Gear Oil (GL-5)	Super AYC	0.55 Litres
AYC Torque Transfer Mechanism	Dia-Queen ATF SPIII		0.60 Litres
ACD/AYC Hydraulic Piping Fluid	Dia-Queen ATF SPIII		1.0 Litre
Power Steering	Automatic Transmission Fluid: Dexron III or Dexron II		Aprox 1.0 Litre
Air Conditioning Refrigerant	R-134a (HFC-134a)		480-520 grams
Compressor Oil	SUN PAG 56		120ml

Use of additives is not recommended since they may reduce the effectiveness of additives already included in the engine Oil, it may result in failure of the mechanical assembly

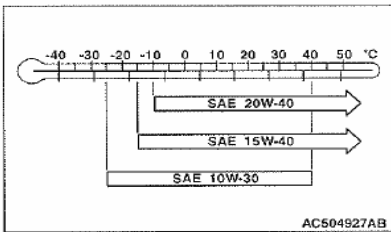

(1) Select engine oil of the correct SAE viscosity number according to the atmospheric temperature


(2) Use engine oil conforming to the following classification
ACEA for service: A1, A2 or A3
API: for service SG or higher

NOTE: SAE 5W-30 engine oil can only be used to improve engine startability in very cold weather areas where the lowest atmospheric temperature is below the range shown in the illustration. In this case, use engine oil conforming to the following classification:

ACEA Classification: For service A3
API Classification: For service SG or higher

LANCER EVOLUTION VIII (European)			
Item	Oil / Fluid Grade / Description	Component Type / Variant	Total Capacity
Engine	ACEA and API Classification: A1, A2, A3 / API: SG or higher For Details Regarding Viscosity, See Information Below	4G63	5.1 Litres
Cooling	Mitsubishi Genuine Dia-Queen Super Long Life Coolant or Equivalent (High Quality Ethylene Glycol Antifreeze Coolant)		6.0 Litres
Brake/Clutch Fluid	Dot 3 or Dot 4		As Required
Manual Transmission	Gear Oil API Classification GL-4, SAE 75W-85W, 75W-90	5 Speed	2.8 Litres
Transfer Box (with ACD)	Mitsubishi Genuine LSD Gear Oil: Part No: 8149630 - (3775610) EX or: Castrol Hypoy LS		0.60 Litres
Rear Axle: (Vehicles with AYC/ACD)			
Differential	Mitsubishi Genuine DIA QUEEN LSD Gear Oil (GL-5)	Super AYC	0.55 Litres
AYC Torque Transfer Mechanism	Dia-Queen ATF SPIII		0.60 Litres
ACD/AYC Hydraulic Piping Fluid	Dia-Queen ATF SPIII		1.0 Litre
Power Steering	Automatic Transmission Fluid: Dexron III or Dexron II		Aprox 1.0 Litre
Air Conditioning Refrigerant	R-134a (HFC-134a)		480-520 grams
Compressor Oil	SUN PAG 56		120ml

Use of additives is not recommended since they may reduce the effectiveness of additives already included in the engine Oil, it may result in failure of the mechanical assembly

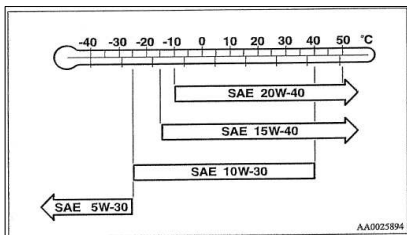

(1) Select engine oil of the correct SAE viscosity number according to the atmospheric temperature

(2) Use engine oil conforming to the following classification
ACEA for service: A1, A2 or A3
API: for service SG or higher

NOTE: SAE 5W-30 engine oil can only be used to improve engine startability in very cold weather areas where the lowest atmospheric temperature is below the range shown in the illustration. In this case, use engine oil conforming to the following classification:

ACEA Classification: For service A3
API Classification: For service SG or higher